


CONVEYOR BELT OPTIMIZATION

LIFTUBE®



INNOVATIVE PROCESSES FOR BULK HANDLING

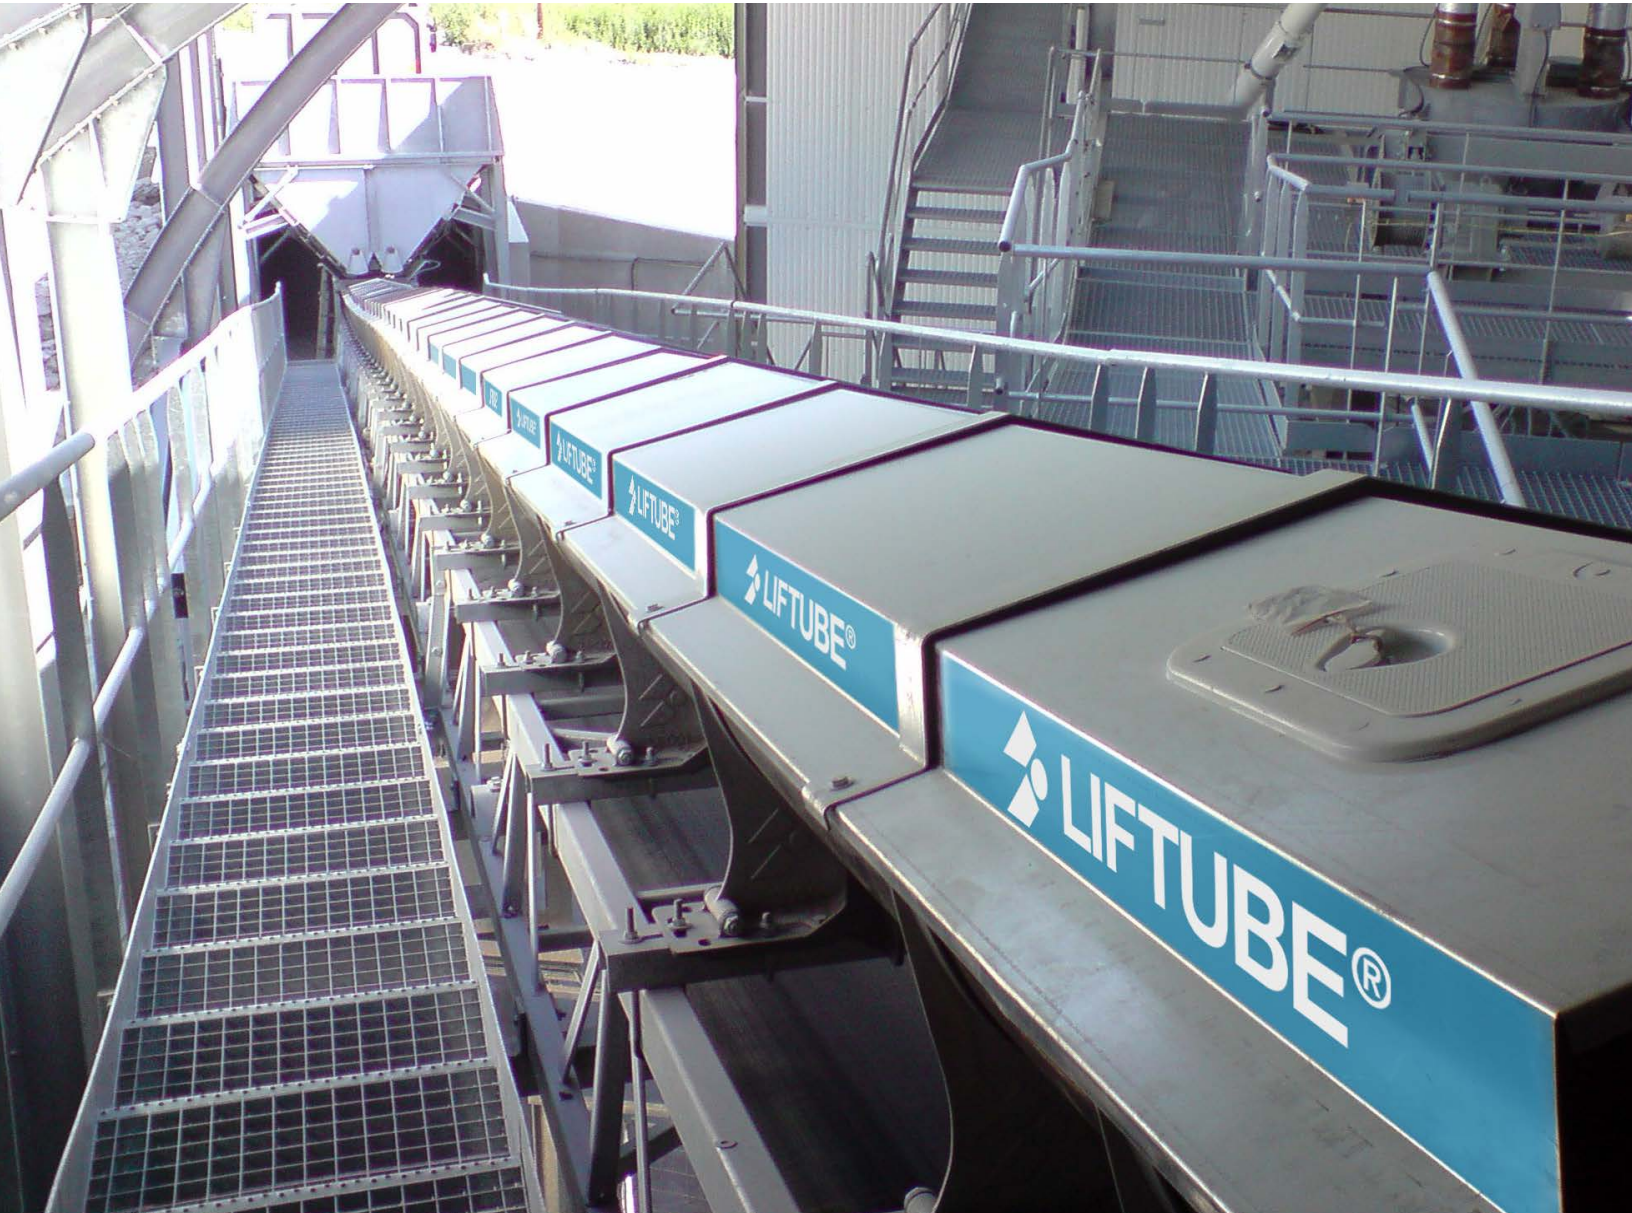

**STANAM
INDUSTRIES**
STANDARD INDUSTRIE International group

OUR SOLUTION

Liftube gives you the ability to control material being transported by conveyor belts to avoid overflow and contain dust. This in turn, will greatly improve the overall safety of the conveyor and its environment.

The LIFTUBE® system enables you to comply with environmental and exceed safety standards while reducing your operating, maintenance and cleaning costs.

IN USE AT

- Cement plants
- Steel manufacturing plants
- Foundries
- Thermal power plants
- Cleaning companies
- Glass factories
- Mines and quarries
- Limeworks
- Coke works
- Incineration plants
- Mills
- Food processing facilities
- Petrochemicals
- Chemicals
- And more...


THE ADVANTAGES


- Sealing (reduction of dust emissions)
- Improved safety
- Quick Return on Investment
- Eliminates material overflow
- Easy to maintain

OUR SERVICES INCLUDE

- On-Site Services
- Technical Recommendations (including scale, scope and layout)
- Site Installation Drawings
- Full Installation of Product (if desired)
- Up to 3-year warranty
- On-site & external training*
- After-Sales Support

OPTIONS

- High temperature
- ATEX zone 21 
- Food Grade
- Self-extinguishing

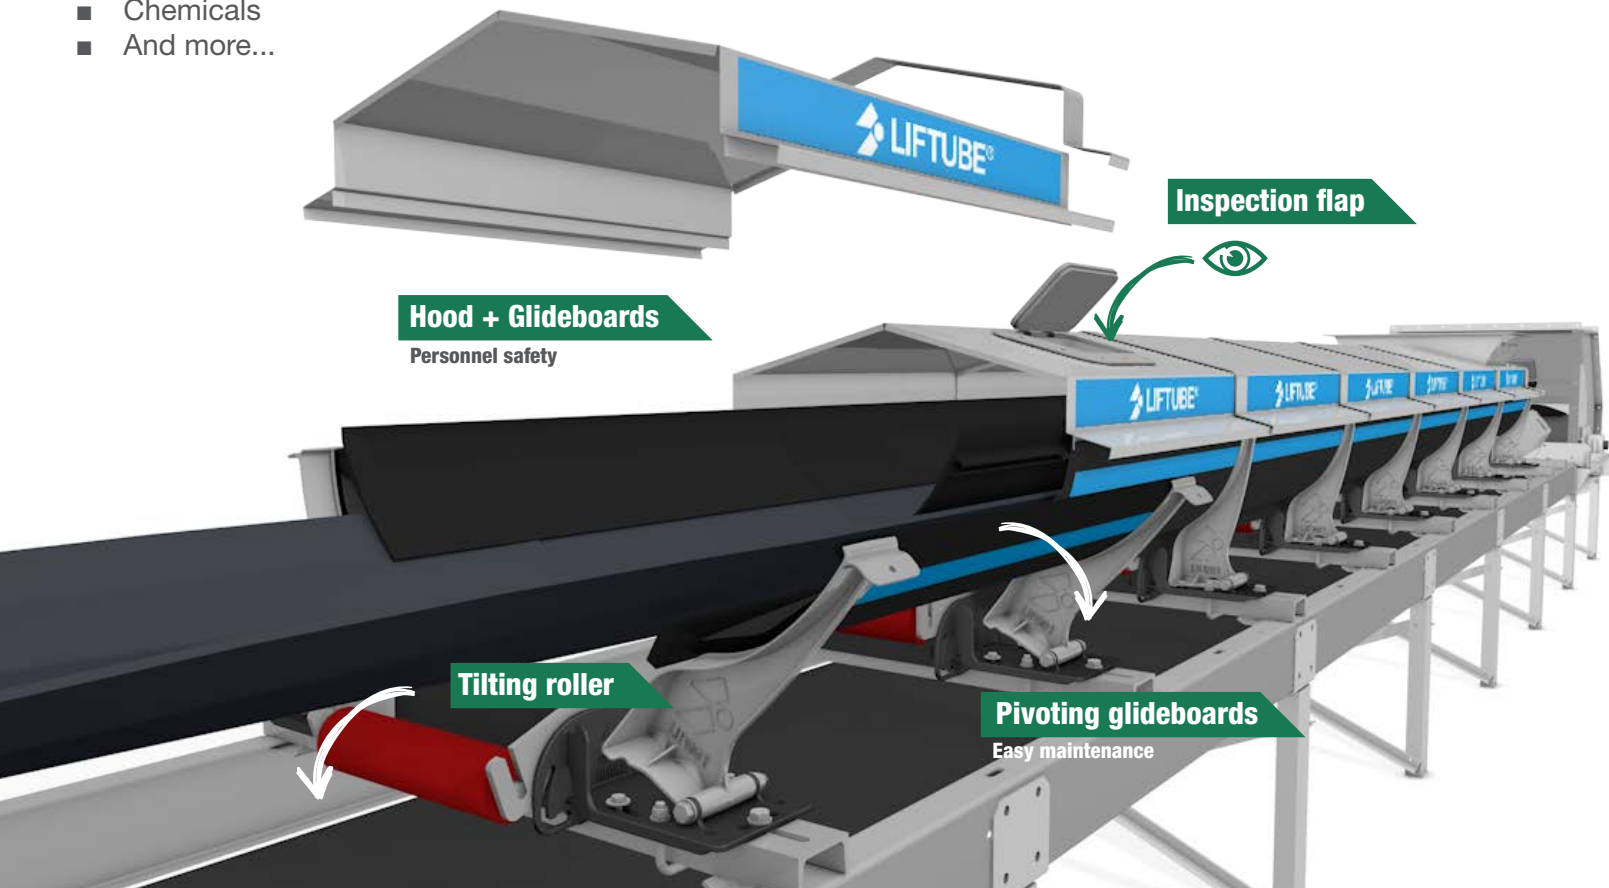



OUR ACCESSORIES FOR CONVEYOR BELT: YOUR ANSWER FOR PROBLEMS OF SAFETY & SEALING

The patented **LIFTUBE®** and the **dust-collector** are accessories for conveyor belt.

The **LIFTUBE®** system enables the belt to run on a central horizontal tilting roller and to slide on the glideboards, which also tilt.

A removable hood can be adapted to the equipment to reduce belt conveyor dust emission.

To facilitate maintenance, the rollers are accessible via innovative tilting supports.

The conveyor belt remains accessible by tilting the glide boards after removing the hoods, skirtings and the various product guiding elements.

	LIFTUB2	LIFTUBL
■ Belt width:	From 18" [500 mm] to 48" [1200 mm]	From 42" [1000 mm] to 54" [1400 mm]
■ Belt speed:	From 1 to 590 fpm [0,05 to 3 m/s]	From 1 to 984 fpm [0,05 to 5 m/s]
■ Output:	Up to 771 short ton/h [700 t/h]	Up to 1322 short ton/h [1200 t/h]
■ Particle size:	Up to 8" [200 mm]	Up to 12" [300 mm]
■ Density:	Up to 250 lb/cf	Up to 250 lb/cf
■ Product temperature:	Up to 428 °F	Up to 428 °F
■ Models:	Standard, Large Capacity, Stainless Steel & Self-Extinguishing	Standard, Large Capacity, Stainless Steel & Self-Extinguishing
■ Installation:	Suitable for both new or existing conveyors	Suitable for both new or existing conveyors

The **dust-collector** is a 6'6"-**LIFTUBE®** kit with filtering unit atop of hood – air-jet filter cleaning. Allow reduction of very fine dust emission just after discharge.

CONTACT US !

info@stanam-industries.com

11 BRANCHES & REPRESENTATIVES AROUND THE WORLD



USA



UK / IRELAND



SPAIN



SOUTH AFRICA



CANADA



MEXICO



ITALY



CHINA



FRANCE




GERMANY



BELGIUM



SINGAPORE

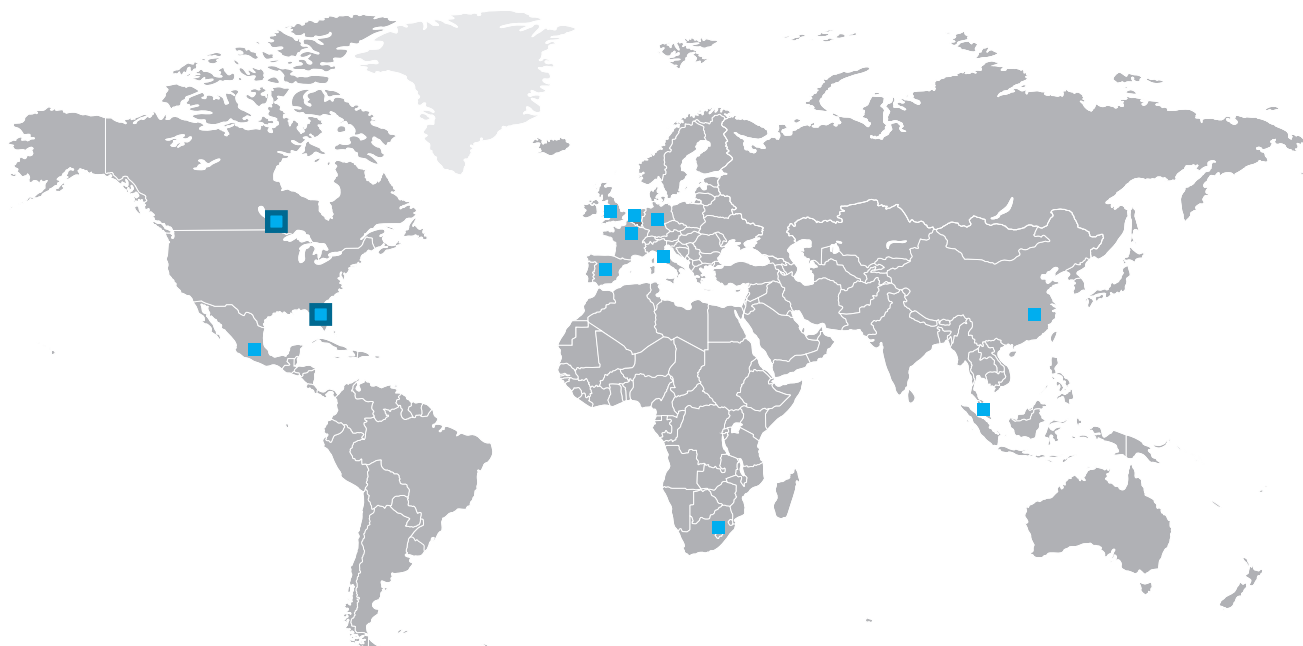

**BLOCKAGE & BUILD-UP
REMOVAL**



**INDUSTRIAL
VACUUM CLEANING**



**SILO & HOPPER
CLEANING SERVICE**



**STANAM
INDUSTRIES**
STANDARD INDUSTRIE International group

www.stanam-industries.com

USA - STANAM INDUSTRIES INC

12845 US Highway, 19 North, CLEARWATER FLORIDA 33764
☎ 727 538 5599 - TOLL 1-855-814-9660
📠 727 538 2299

CANADA - STANAM INDUSTRIES INC

295 Robinson Street, Suite 100
Oakville, ON, L6J 1G7 CANADA
☎ +1 (416) 299 4131

COBR-USA-28022024